

Mk6N

(GENIUS SERIES)

Class 0.5S, Class 1 & 2
Meters for all HVCT and MVCT applications



Mk6N - Advanced Three Phases Electronic Revenue Meter

The EDMl Mk6N is an upgraded version of the highly acclaimed Mk6 Genius Energy Meter. The original EDMl Mk6 stunned the market back in 1998 with its advanced power quality functionality and scripting capability. The new Mk6N is set to do the same today.

Utilizing the same advanced meter design and firmware platform as the original Mk6, the new Mk6N meter updates this platform to address new IEC standards and to incorporate an updated power supply and input protection technology utilized by our latest range of energy meters (including technology drawn from Mk6E Genius and Mk10/Mk7 Atlas series of meters).

Basic Technical Specification

Accuracy

- Class 0.5S, Class 1 and Class 2
- IEC62052-11, IEC62053-21 (Class 1), IEC62053-22 (Class 0.5S), IEC62053-23 (Class 2)
- IS 14697 and IS 13779

Measurement Modes

- Single Phase (3 Circuits)
- 3 Phase 3 Wire
- 3 Phase 4 Wire

Measured Energy Values

- 3 Elements, 4 Quadrants
- Import/Export Wh, varh and VAh
- Absolute Wh, varh and VAh
- Phase A, B, C or Total

Other Measured and Displayed Values

- W, var, VA
- True RMS Voltage (3 Phase)
- True RMS Current (3 Phase)
- Power Factor
- Frequency
- Phasor Angles

Load Survey / Load Profile

- NEM Compliant
- Standard 400 day-channel capacity at 30 minute intervals
- Optional additional storage to increase to over 2,500 day-channel capacity at 30 minute intervals
- Up to 50 Channels
- Per survey interval programmable from 1 second to 1 month
- Multiple independent surveys
- Energy, instantaneous readings and pulsing inputs as potential survey channel sources
- Ability to store average / minimum / maximum values over interval duration for individual channels

Time of Use

- 8 rates plus unified rate
- Up to 12 separate import and export registers
- Up to 200 programmable special days
- Daily, Weekly, Monthly, Yearly, Special
- 13 or more previous periods
- Block or Rolling Maximum Demand
- Time of Maximum Demand
- Configurable Billing Reset Button

Communications Options

- ANSI Type 2 Optical Port (ANSI C12.18) or IEC 62056-21 (IEC 61107) Optical FLAG Port
- RS232 (RTS/CTS and DTR/DCD)
- RS485 (2 or 4 wire multidrop)
- SCADA
- Modems (PSTN/GPRS/GSM/CDMA)
- Internal Modem Power Supply
- MV-90™ Compatible
- PPP / GPRS
- MODBUS
- DNP3
- Master / Slave arrangement with up to 31 'Slave' meters accessed through one 'Master' gateway meter

Voltage

- Operating Range of 57V to 240V (phase to neutral)
- Burden of < 10VA per phase @ Vn (3 Phase)
- Frequency of 45 to 65Hz

Current

- CT Range of 1/1.2A, 5/6A, 1/4A and 5/20A
- WC Range of 10/100A (Class 1 Only)
- Short time over-current of 20 times Imax for 0.5 seconds
- Burden of less than 0.5VA per phase

Auxiliary Supply Options

- 240V, 110V Aux Only (other voltages available on special order)

Pulsing Inputs / Outputs

- Maximum of 8 I/O with up to 8 outputs (2 standard) or 6 inputs
- Output voltage - 5 ~ 220V DC, 12 ~ 240V AC
- Output current of 0.1A maximum
- Output pulse width 2 output independent LEDs of 1ms to 250ms
- Programmable output polarity
- Input Voltages of 5, 12, 48, 110, 240V AC / DC
- Time synchronised (optional)

Environmental

- Operating Range of -10 to +60°C
- Storage Range of -40 to +85°C

Time Clock

- Accuracy (internal) within 30 seconds per month
- Backup time of 2 years without power
- Backup utilizing either lithium battery or optional SuperCap
- Mains synchronised or internal crystal time keeping. Mains synchronised reverts to internal crystal on loss of voltage on all phases.

Data Storage (Configuration, TOU Data and Load Survey Data)

- FlashRAM
- Battery backed up RAM

Sag / Swell

- 5 Cycle Resolution
- Records time / date / phase / duration and worst excursion
- Programmable trigger levels

LCD Display

- 16 Character by 2 line alphanumeric display
- Programmable units, multipliers and leading zeros
- Up to 64 user definable screen displays
- Displays any available meter parameter

Optional Functions

- Quality of Supply (QOS) features
- Waveform Capture
- Harmonic analysis to the 50th harmonic
- THD Measurement
- Fundamental energy measurement

Software

- EDMl EziView software available for programming and reading of meter (Runs on Windows 98/ME/NT/2000/XP)
- EziView also allows offline configuration of tariff programs and all meter parameters, for later upload to meters.

Equipment Failure Alarms (EFAs)

A single user defined alarm condition (via extensions) is available plus pre-programmed alarms based on numerous:

- Self-Checks
- Tamper and wiring checks

These Alarms Can:


- Turn on LED, LCD indicator or relay output
- Record an event in the event log
- Trigger an event such as a remote alarm, dial an emergency number, send an SMS to a programmable number or send alarm messages via GPRS to a programmable server

Extensions for Customer Applications: standard to order

Using "EziScript", complex register manipulations can be performed to develop required application.

Examples of currently available Extensions are:

- Availability Based Tariff
- On line Prepayment
- Summation Metering
- Street Light Controller
- DT Remote Load Management
- Multi Utility Services
- Maximum Demand Controller
- Magnetic tamper detection
- Dual Source Energy Management
- Average voltage / current / unbalance, THD etc.
- Dynamic Reactive Compensation
- Voltage Sag / Swell or Power Outage
- Send SMS / GPRS Alarm on Equipment Failure Alarm

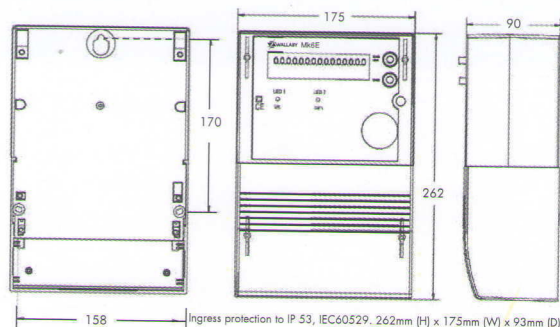

Wallaby Metering Systems Pvt Ltd

M3-9th Street, Dr. VSI Estate, Thiruvanniyur, Chennai - 600041
Ph +91 44 42251600 Fax +91 44 24544551
www.wallaby-meters.com

EDMI Limited

47 Yishun Industrial Park A, Singapore 768724
Ph +65 6756 2938 Fax +65 6756 0125
www.edmi-meters.com

Omne Agate Systems Pvt Ltd

II Floor, MNO Complex, 99, Greaves Road, Chennai - 600006
Ph +91 44 28294551-54 Fax +91 44 28294555
www.omneagate.com

